




SCHALL-EX® GS-8


- ▶ For **standard doors** with 8 mm glass thickness
- ▶ Single actuation
- ▶ Suitable for DIN-L and DIN-R doors
- ▶ U-profile affixed with appropriate construction adhesive

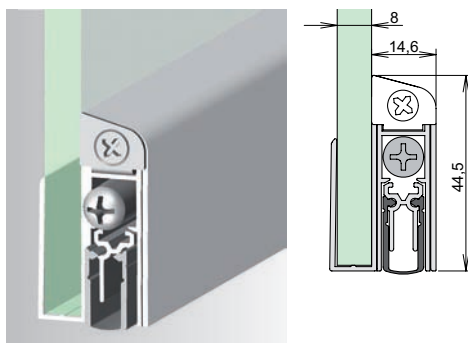

- ▶ Silver-coloured, anodised C-0
- ▶ Stainless steel- coloured, anodised C-31

SCHALL-EX® GS-10


- ▶ For **standard doors** with 10 mm glass thickness
- ▶ Single actuation
- ▶ Suitable for DIN-L and DIN-R doors
- ▶ U-profile affixed with appropriate construction adhesive

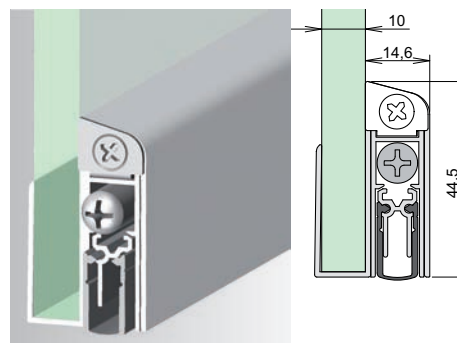

- ▶ Installation: On the opening surface
- ▶ Actuator button: On hinge side

Surface finish

Stop

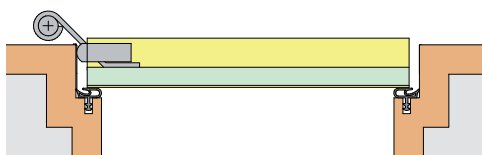

Technical data

Glass thickness	8 mm	10 mm
Overall dimensions H x W	14.6 x 44.5 mm	14.6 x 44.5 mm
Actuation	Single actuation	Single actuation
Sealing profile material	Silicone, self-extinguishing	Silicone, self-extinguishing
Throw	11 mm	11 mm
Minimum length	235 mm (no shortening possible)	235 mm (no shortening possible)
Standard lengths	708, 833, 958, 1,083, 1,208 mm	708, 833, 958, 1,083, 1,208 mm
Maximum length	1,333 mm	1,333 mm
Can be cut to length	125 mm	125 mm
Individually packed	Plastic bag	Plastic bag
Accessories (included in delivery)	Item no. 5503 including stainless steel actuator plate	Item no. 5503 including stainless steel actuator plate

Internet

Installation instructions
List of accessories with illustrations
Cross-sections, 1:1

Installation instructions
List of accessories with illustrations
Cross-sections, 1:1