




## SCHALL-EX® GS-H8


- ▶ For commercial-grade doors with 8 mm glass thickness
- ▶ Single actuation
- ▶ Suitable for DIN-L and DIN-R doors

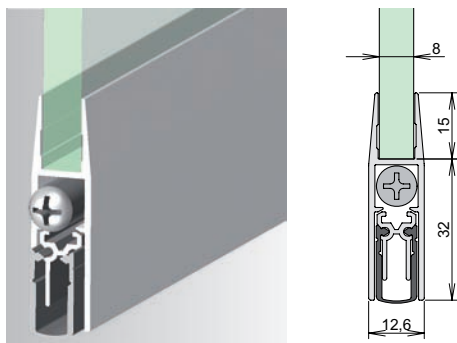

- ▶ Silver-coloured, anodised C-0
- ▶ Stainless steel- coloured, anodised C-31

### Surface finish

### Stops

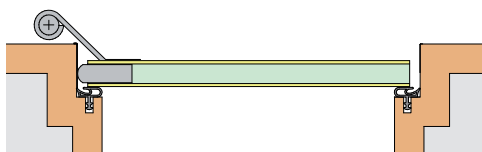

### Technical data


Glass thickness	8 / 10 mm
Dimensions	15 x 32 x 12.6 mm
Actuation	Single actuation
Sealing profile material	Silicone, self-extinguishing
Throw	11 mm
Minimum length	235 mm (no shortening possible)
Standard lengths	708, 833, 958, 1,083, 1,208 mm
Maximum length	1,333 mm
Can be cut to length	125 mm
Individually packed	Plastic bag
Accessories (included in delivery)	Item no. 5503 including stainless steel actuator plate

### Internet

Installation instructions  
List of accessories with illustrations  
Cross-sections, 1:1

## SCHALL-EX® GS-H10

- ▶ For commercial-grade doors with 10 mm glass thickness
- ▶ Single actuation
- ▶ Suitable for DIN-L and DIN-R doors

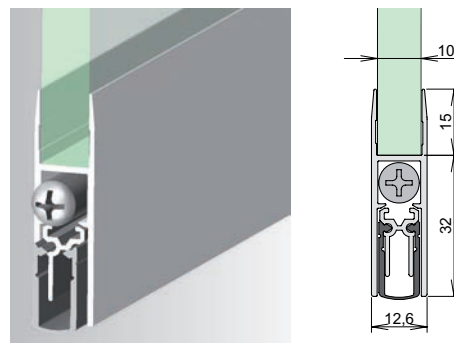

- ▶ Installation: Under the door leaf
- ▶ Actuator button: On hinge side

### Optional



- ▶ Optional set-up of the passive wing  
for a Dorma lock, item no. 12302