


Fully automatic flush bolt

For wooden doors

2

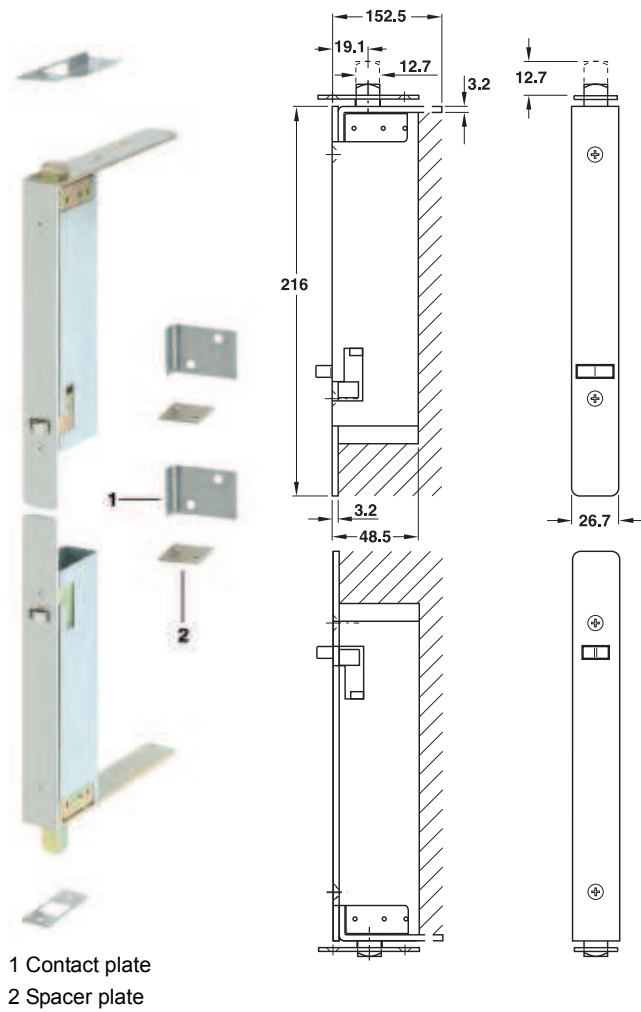


- Area of application: Automatic locking and release
- Travel: 12.7 mm
- Height: Housing 206.5 mm
- Width: Housing 26.7 mm

Note

A floor socket with a bolt aperture of 19 mm can be used as alternative to the floor striking plate.

Functionality

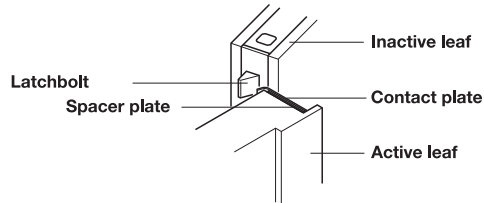

When closing the active leaf, the inactive leaf is locked automatically. The contact plates protect the facing of the active leaf when operating the latchbolt. When opening the active leaf, the inactive leaf is unlocked automatically.

Supplied with

- 2 Flush bolts (top and bottom)
- 2 Striking plates
- 2 Contact plates (polyamide coated)
- 6 Spacer plates
- 1 Set of fixing screws

Material	Finish	Cat. No.
Stainless steel	Matt	911.62.034
Brass	Polished	911.62.035


Packing: 1 pair

Floor socket

▶ AH 2.182

Fully automatic flush bolt

For wooden or metal doors

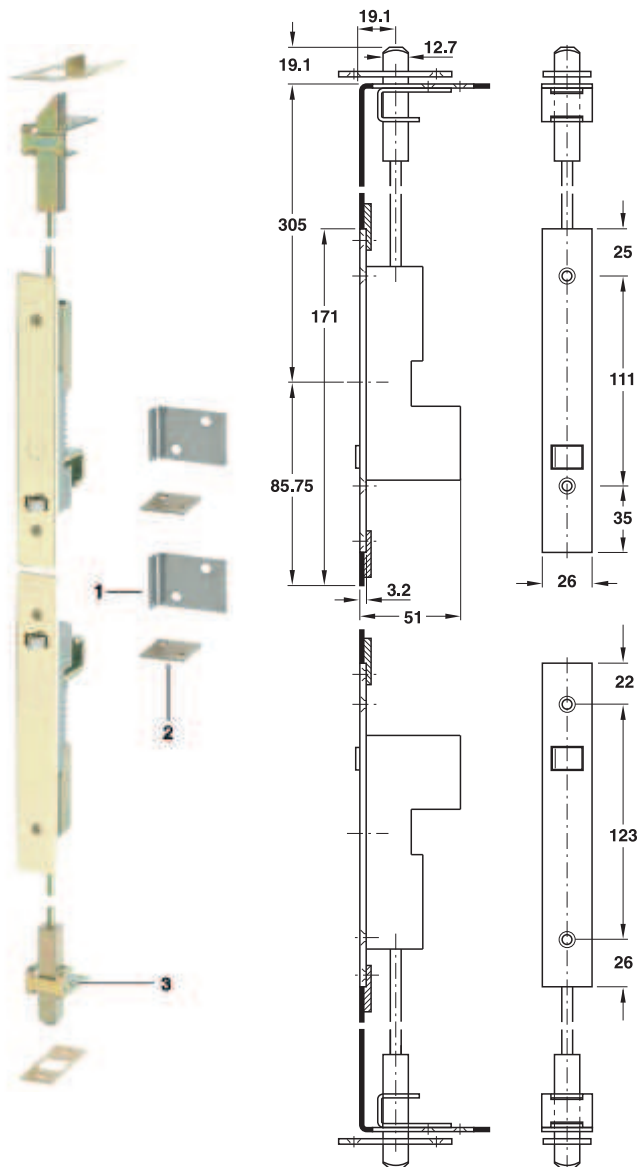


- 1 Contact plate
- 2 Spacer plate
- 3 U-shaped guide plate

- Area of application: Automatic locking and release
- Travel: 19.1 mm
- Width: Housing 26 mm

Note

A floor socket with a bolt aperture of 19 mm can be used as alternative to the floor striking plate.

Functionality

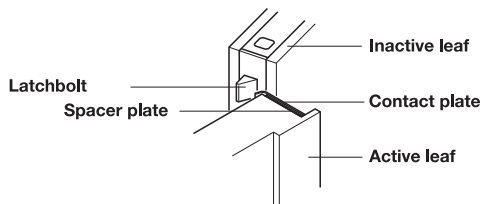

When closing the active leaf, the inactive leaf is locked automatically. The contact plates protect the facing of the active leaf when operating the latchbolt. When opening the active leaf, the inactive leaf is unlocked automatically.

Supplied with

- 2 Flush bolts (top and bottom)
- 2 Striking plates
- 2 U-shaped guide plates
- 2 Guide reinforcements
- 2 Contact plates (polyamide coated)
- 6 Spacer plates
- 2 Bars
- 1 Set of fixing screws

Material	Finish	Cat. No.
Stainless steel	Matt	911.62.037
Brass	Polished	911.62.038

Packing: 1 pair